



C6016 flange lathe metal lathe facing digital readout floor facing cutting machine

Our Product Introduction

for more products please visit us on lathemach.com


Basic Information

- Place of Origin: Henan, China
- Brand Name: Baishun
- Certification: ISO
- Model Number: C6016
- Minimum Order Quantity: 1 set
- Price: Negotiation
- Packaging Details: Export standard wooden case package or Negotiation with customers
- Delivery Time: 55 work days
- Payment Terms: T/T, L/C, Western Union
- Supply Ability: 80 Set/Sets per Month



Product Specification

- Max. Length Of Workpiece (mm): 400 Mm
- Machining Capacity: Heavy Duty
- Spindle Bore(mm): 190
- Max. Turned Length (mm): 2500 Mm
- Type: Floor Type
- Year: 100% Brand New
- Voltage: 3 Phase 380V 50HZ
- Dimension(L*W*H): 4200*2200*1950mm
- Weight (KG): 6000 KG
- Name: C6016 Digital Readout Floor Facing Lathe Cutting Machine For Flange
- Weight: 6000kg
- Max. Swing Diameter: 1600mm
- Power: 380V, 50hZ. 3Phase

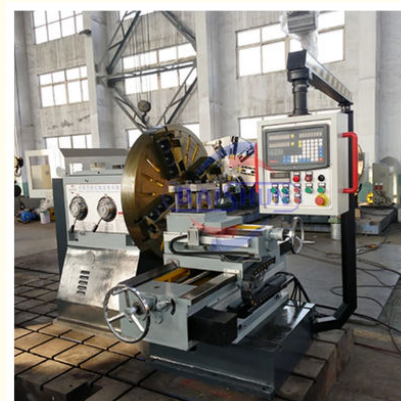


More Images



Product Description

C6016 digital readout floor facing lathe cutting machine for flange

flange processing facing lathe machine real pictures for your reference:

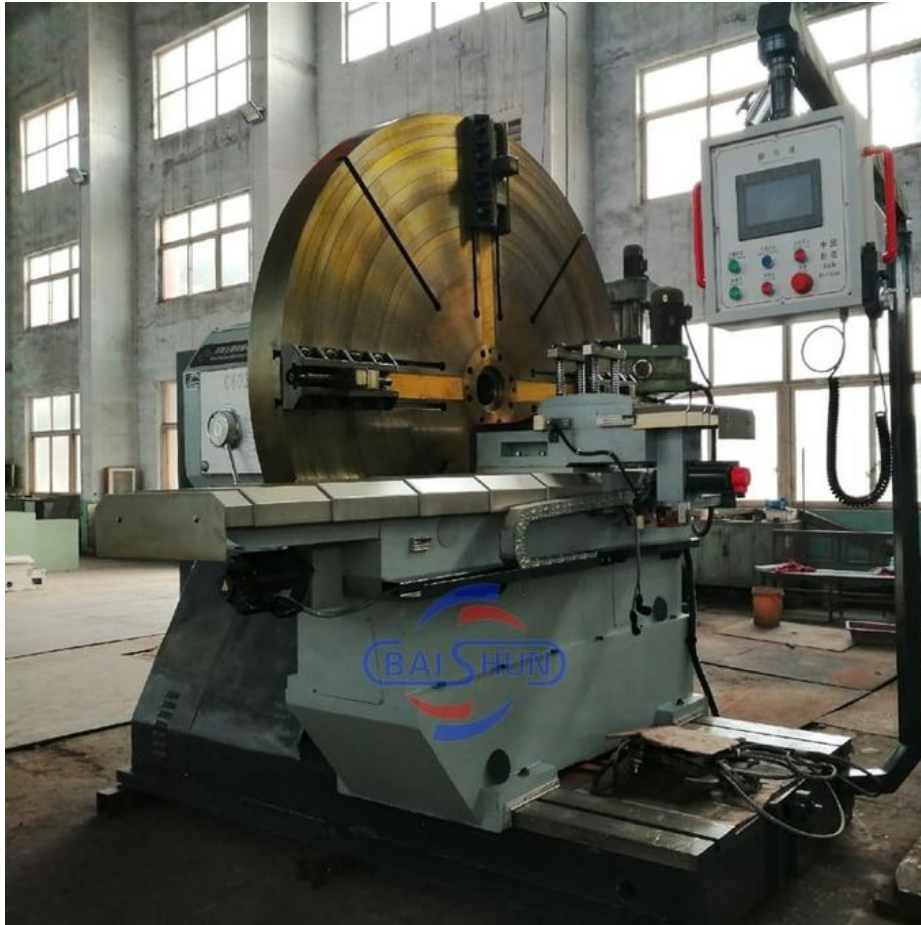



Flange processing facing lathe machine introduction:

This Engine Lathe or landing lathe is mainly used to process large, medium plate and cylinder workpiece such as flange, valve, gland, plate, motor cover, tire mold, etc.

This lathe can be widely applied in the production field of energy, transportation, oil, chemical industry, mining, railway, car making and so on.

1. Engine Lathe is floor face lathe, mainly suitable for high-speed steel or carbide cutting tools, cast iron, steel, forgings and non-ferrous disc type rotating body metal parts machining.
2. To complete the cylindrical, conical, end, grooving and other machining processes, can meet part of the rough and fine turning.
3. All the gears are precision grounded, with long life and low noise;
4. All guideways are quenched and hardend, protection covers equipped for the guideways, free from the chips falling on the guideways, ensuring feed precision and speed.

Technical Parameters:

Item	Unit	C6010	C6016	C6020	C6025	C6030
Chuck diameter	mm	800	1400	1600	2000	2500
Max. turning diameter	mm	1000	1600	2000	2500	3000
Max. length of work pieces	mm	200	400	600	600	600
Max weight of workpiece	T	1	2	3	3	5
Power of main motor	kW	15	11	15	15	22
Spindle speed	r/min	8-120	16-128	12-94	12-94	4-40
Spindle diameter	mm	190	200	200	200	300
Feed way of tool rest	Infinitely variable frequency					
Horizontal stroke	mm	320	320	320	320	320
Longitudinal travel	mm	500	800	900	1400	1400
Weight	T	4	5	8	10	17

Packaging & Shipping

-
-
-
-
-

Our Services

Our Service:

- 1.Any inquiries will be replied within 12 hours
 - 2.Professional manufacturer, Welcome to visit our factory at any time
 3. OEM services are welcomed, and we can help you to print your logo, company information etc on our products and package
 - 4.High quality, fashion designs, reasonable & competitive price and fast lead time
 - 5.After-sale service
 - 6.Faster delivery
 7. Protection of your sales area, ideas of design and all your private information
- You can pay for the order via: T/T, western union, L/C at sight.
Our ultimate goal is your satisfaction

-



Henan Baishun Machinery Equipment Co., Ltd.



+8618939515188



sale@goodlathe.com



lathemach.com

No.65, Tianming Road, Jinshui District, Zhengzhou City, Henan Province, China