



CW6180B CW6180Q CW6263 CK6163*2000 Bench Lathe Machine Mini Flatbed Cnc

Our Product Introduction

for more products please visit us on lathemach.com


Basic Information

- Place of Origin: Henan, China
- Brand Name: BAISHUN
- Certification: ISO9001:2008
- Model Number: CK6132x1000MM
- Minimum Order Quantity: 1 set
- Price: Negotiation
- Packaging Details: Export standard wooden case package or Negotiation with customers
- Delivery Time: 45 work days
- Payment Terms: T/T, L/C, Western Union
- Supply Ability: 50 Set/Sets per Month



Product Specification

- Max. Spindle Speed (r.p.m): 100~2500r/min
- Dimension(L*W*H): 2300x1100x1650mm
- Voltage: 380V/50Hz
- Name: CJK6132 CNC Lathe Machine
- Swing Over Bed: 320mm
- Swing Over Carriage: 130mm
- Distance Between Centres: 500mm
- Spindle Bore: 38mm
- Electrical Toolpost: 4 Stations
- Motor Power: 3KW
- Gross Weight: 1000KGS
- Max. Swing Diameter: 320mm
- Weight: 1000KGS
- Power: 3KW
- Highlight: CK6163, bench lathe machine, flatbed cnc

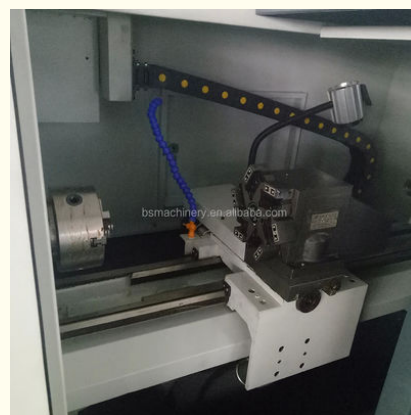

More Images



Product Description

Product Description

CK6163*2000 High Precision Bench Type Mini Flat Bed Lathe Machine

This series of machines is a well-established and designed with a compact design, attractive appearance, high spindle torque, strong rigidity, stable and reliable performance, and excellent accuracy retention.

The headstock has been optimized for turning disc and shaft parts. It can handle straight, curved, metric, and inch threads, as well as multi-threaded operations. It is suitable for processing complex-shaped discs and shafts with high precision requirements.

1. Spindle bearings adopts domestic famous-brand company products;
2. The bed is adopted high strength cast iron, after 3 time tempering, so that it has high rigidity and vibration resistance;
3. With electrical turret, it can achieve high positioning, fast speed for toolchange and high performance;
4. With feeding motor and lead screw for type of direct connection, it can assure the machining precision and positioning accuracy.
5. Headstock takes symmetrical structure to make thermal deformation be even, avoiding the spindle center generates offsets.

Product Description:

Technical items / Model	CW6163 / CW6263	CW6180Q / CW6280Q	CW6180B / CW6280B	CW61110Q / CW62110Q	CW61125Q / CW62125Q	CW61125B	CW61160B	CW61160	CW61200	CW61250
Swing diameter over bed	630mm	800mm	800mm	1100mm	1250mm	1250mm	1600mm	1600mm	2000mm	2500mm
Swing diameter over carriage /cross slide	350mm	480mm	480mm	800mm	920mm	860mm	1200mm	1200mm	1600mm	2100mm
Swing diameter over gap/saddle	CW6163-No gap	CW6180Q-No gap	CW6180B-No gap	CW61110Q--No gap	CW61125Q--No gap	No gap				
	CW6263-800mm	CW6280Q-1000mm	CW6280B-1000mm	CW62110Q--1300mm	CW62125Q-1500mm					
Max. Length of workpiece	1500mm; 2000mm; 3000mm;4000mm; 5000mm; 6000mm; 8000mm; 10000mm; 12000mm; 14000mm; 16000mm; 18000mm; 20000mm									
Max. Weight of workpiece	2 tons	2 tons	2.5 tons	2.5 tons	2.5 tons	6 tons	6 tons	16 tons	16 tons	16 tons
Spindle hole diameter	105mm	105mm	105mm	105mm	105mm	130mm	130mm	130mm	130mm	130mm
Guide rail width	550mm	550mm	600mm	600mm	600mm	755mm	755mm	1100mm	1100mm	1100mm
Main motor power	11 kw	11 kw	11 kw	11 kw	11 kw	22 kw	22 kw	22 kw	22 kw	22 kw

Product Features:

- (1) The machine can process precisely internal or external diameter, face, taper, arc and threading with high efficiency
- (2) Standard tool-post is 4-stations, also 6-stations tool-post can be optional selection
Spindle speed changed by frequency
- (3) Induction harden bed-way. Bed saddle with plastic sticker can improve the accuracy and service life of the machine
- (4) The spindle is supported by imported precision bearings
- (5) Normally machine is provided with 3-jaw chuck. According to customer's optional selection, hydraulic chuck or pneumatic chuck also can be supplied.

Standard accessories

1. 3-jaw chuck and tool-post wrench

- 2.Allen wrench
- 3.Electrical tool post 4 station
- 4.Cooling system
- 5.Manual lubricating system
- 6.Working lamp
- 7.GSK Siemens CNC controller system
- 8.Iron steel stand

Optional accessories

- 1.6 station tool-post
- 2.Pneumatic chuck
- 3.Hydraulic chuck
- 4.Bar auto-feeding device
- 4.Controller system GSK, Fanuc
- 5.Auto-lubricating system

Product pictures:

Our Services

1. Inquiry and consulting support.
2. Sample testing support.
3. Visit our company
4. Training how to install and use the machine.
5. Engineers available to service machinery overseas.
6. The warranty time is 12 months, the spare parts will be offered with factory cost price.



Henan Baishun Machinery Equipment Co., Ltd.



+8618939515188



sale@goodlathe.com



lathemach.com

No.65, Tianming Road, Jinshui District, Zhengzhou City, Henan Province, China