



Manual Horizontal Lathe Machine Cw61125q Metal Lathe Horizontal Bed Width 600mm

Our Product Introduction

for more products please visit us on lathemach.com

Basic Information

- Place of Origin: China
- Brand Name: BAISHUN
- Certification: CE, ISO
- Model Number: CW61125Q, CW62125Q
- Minimum Order Quantity: 1 Set
- Price: Negotiation
- Packaging Details: Export standard wooden case package or Negotiation with customers
- Delivery Time: 45 working days
- Payment Terms: T/T, L/C, Western Union
- Supply Ability: 20 Set/Sets per Month




Product Specification

- Product Name: Manual Horizontal Lathe Machine Cw61125q
Metal Lathe Horizontal Bed Width 600mm
- Type: Floor Type
- Swing Diameter Over Bed: 1250mm
- Swing Diameter Over Carriage: 920mm
- Max. Weight Of Workpiece: 3500kg
- Spindle Hole Diameter: 105mm
- Guide Rail Width: 600mm
- Key Words: Horizontal Lathe
- Highlight: **Horizontal Lathe Machine Cw61125q,
Bed Width 600mm Horizontal Lathe Machine**



More Images



Product Description

Manual Horizontal Lathe Machine Cw61125q Metal Lathe Horizontal Bed Width 600mm

Product Introduction:

This machine tool is mainly responsible for various turning tasks. It can turn the end faces, outer circles, inner holes, metric threads, inch threads, module threads, and diametral pitch threads of various parts. The upper tool holder can be used to shorten the taper of a single motor vehicle, and the upper tool holder can also be fed longitudinally in conjunction with the motor vehicle to lengthen the taper. In addition, it can also undertake drilling, boring and other processes. The machine tool has high power, high speed, and strong rigidity.

Key Features:

Versatile: CW Heavy Duty Lathe Machine is compatible with high-speed steel and carbide cutting tools, making it suitable for a variety of materials.


Hardened for Precision: Our lathes undergo medium-frequency hardening, resulting in excellent hardness and precision.

Enhanced Stability: The triple support system ensures exceptional spindle rigidity and supporting capacity.

Smooth Operation: Enjoy a large speed range and seamless motion, all while maintaining low temperature-rise.

Experience the ultimate turning performance with our CW Heavy Duty Lathe Machine.



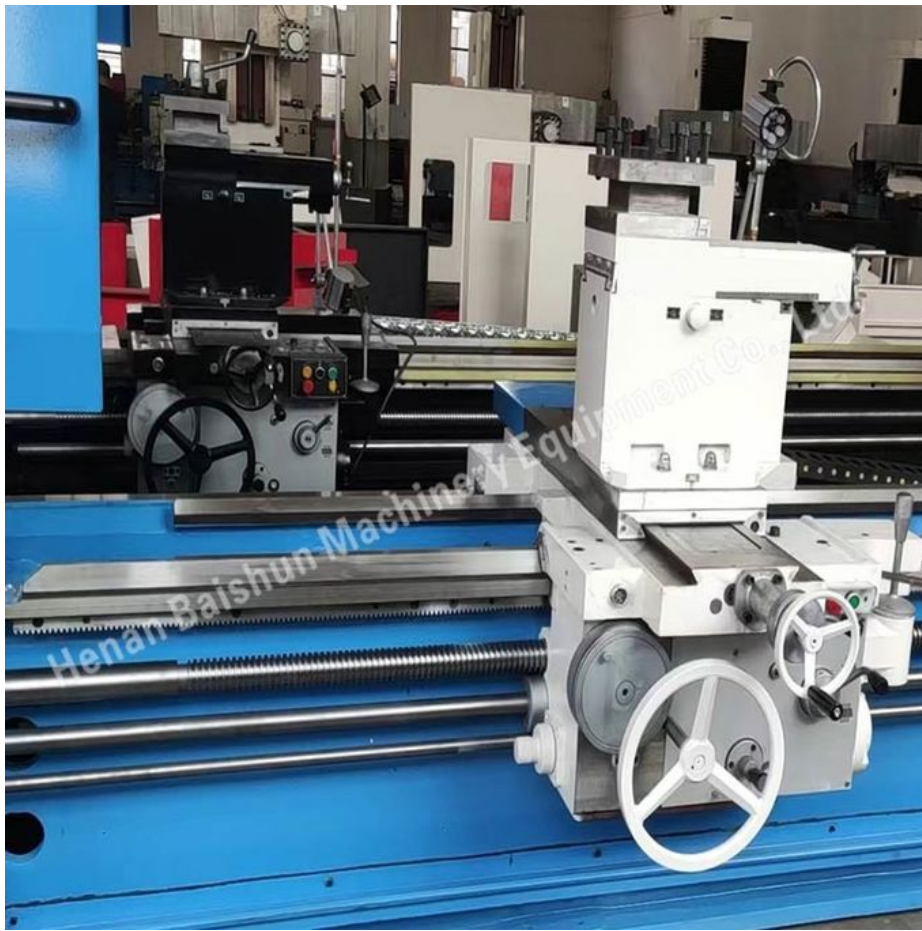

CW61125Q/CW62125Q Series Lathe Machine(2.5 tons load capacity):

Swing over bed: 1250mm;

Swing over cross slide: 920mm;

Processing length: it's up to customer's requirements;

Bed width: 600mm;

Load capacity: 2.5 tons;

Spindle bore: 105mm [Optional 130mm];

Main motor power: 11kw.

Manual Chuck

Choose a 3 or 4 jaw manual chuck according to your needs for the CW Heavy Duty Lathe.

The chuck is a mechanical device that securely holds a workpiece on a machine tool. It uses movable jaws evenly distributed on the chuck body to clamp and position the workpiece.

Gear Spindle Box

Experience mechanical speed changes and strong rigidity with the CW Heavy Duty Lathe's gear spindle box, enabling powerful cutting.

The gear spindle box is a mechanism that changes the main motion speed of the machine tool, such as the spindle speed or the worktable's reciprocating strokes per minute. It can be installed separately or integrated with other mechanisms as part of the machine tool.

Tool Post

Opt for the CW Heavy Duty Lathe's 4-station manual tool post, which can be accompanied by an optional tool post cover at an additional cost.

The tool post is a component of the machine, such as a lathe, where the tool carriage moves perpendicular to its main direction of travel.

Quenching Guide

Achieve greater stability and load capacity with the CW Heavy Duty Lathe's quenching guide, which features a wider bed width.

Quenching the lathe guide rails involves a metal heat treatment process. The guide rails are heated to an appropriate temperature and maintained for a specific duration before being rapidly cooled in a quenching medium. This process significantly enhances the guide rail's service life, wear resistance, and damage resistance, thereby improving lathe production efficiency.

Specification:

Technical items / Model	CW6163 / CW6263	CW6180Q / CW6280Q	CW6180B / CW6280B	CW61110Q / CW62110Q	CW61125Q / CW62125Q	CW61125B	CW61160B	CW61160	CW61200	CW61250
Swing diameter over bed	630mm	800mm	800mm	1100mm	1250mm	1250mm	1600mm	1600mm	2000mm	2500mm
Swing diameter over carriage /cross slide	350mm	480mm	480mm	800mm	920mm	860mm	1200mm	1200mm	1600mm	2100mm
Swing diameter over gap/saddle	CW6163- No gap	CW6180Q- No gap	CW6180B- No gap	CW61110Q-- No gap	CW61125Q- No gap	No gap				
	CW6263- 800mm	CW6280Q- 1000mm	CW6280B- 1000mm	CW62110Q-- 1300mm	CW62125Q- 1500mm					
Max. Length of workpiece	1500mm; 2000mm; 3000mm; 4000mm; 5000mm; 6000mm; 8000mm; 10000mm; 12000mm; 14000mm; 16000mm; 18000mm; 20000mm									
Max. weight of workpiece	2 tons	2 tons	2.5 tons	2.5 tons	2.5 tons	6 tons	6 tons	16 tons	16 tons	16 tons
Spindle hole diameter	105mm	105mm	105mm	105mm	105mm	130mm	130mm	130mm	130mm	130mm
Guide rail width	550mm	550mm	600mm	600mm	600mm	755mm	755mm	1100mm	1100mm	1100mm
Main motor power	11 kw	11 kw	11 kw	11 kw	11 kw	22 kw	22 kw	22 kw	22 kw	22 kw

REAL SHOOTING

PRODUCTION WORKSHOP

CAREFUL AND RIGOROUS, PRECISE ASSEMBLY, EVERY PLACE IS DELICATE
TEEVERY SILK IS OUR DEDICATED EFFORT,



We are a direct-sale lathe machine manufacturer, not a trading company, which means we can offer you the best prices.

Welcome get in touch with us Whatsapp: +86 18003851898



Henan Baishun Machinery Equipment Co., Ltd.



+8618939515188



sale@goodlathe.com



lathemach.com

No.65, Tianming Road, Jinshui District, Zhengzhou City, Henan Province, China