

Pentagonal Tool Post Cnc Vertical Turning Lathe For Dics Metal Cutting Turning Diameter 3500mm With Ce

Basic Information

• Place of Origin: Henan, China

Brand Name: BAISHUN MACHINERY

Certification: CE ISOModel Number: CK5235

Minimum Order Quantity:

• Price: \$76,000.00/sets 1-4 sets

Packaging Details:
 1. Outside we will pack the product with

plasitic to prevent wet.

2. Outside of the cnc vertical lathe machine will be packed by strong wooden pallet.

Delivery Time: 45 Working daysSupply Ability: 20 Set/Sets per Month



Product Specification

 Max. Length Of Workpiece 2500 (mm):

• Max. Spindle Speed (r.p.m):90 R.p.m

Machining Capacity: Medium Duty

Spindle Bore(mm): 105
Width Of Bed (mm): 250 Mm
Spindle Motor Power(kW): 55
No. Of Spindles: Twin
Number Of Axes: 2

Travel (X Axis)(mm): 1900 Mm
Travel (Z Axis)(mm): 1250 Mm
Positioning Accuracy (mm): ±0.005
Repeatability (X/Y/Z) (mm): ±0.003

• Dimension(L*W*H): 6150*4400*5330mm


• Voltage: 380V



More Images



Pentagonal Tool Post Cnc Vertical Turning Lathe For Dics Metal Cutting Turning Diameter 3500mm With Ce

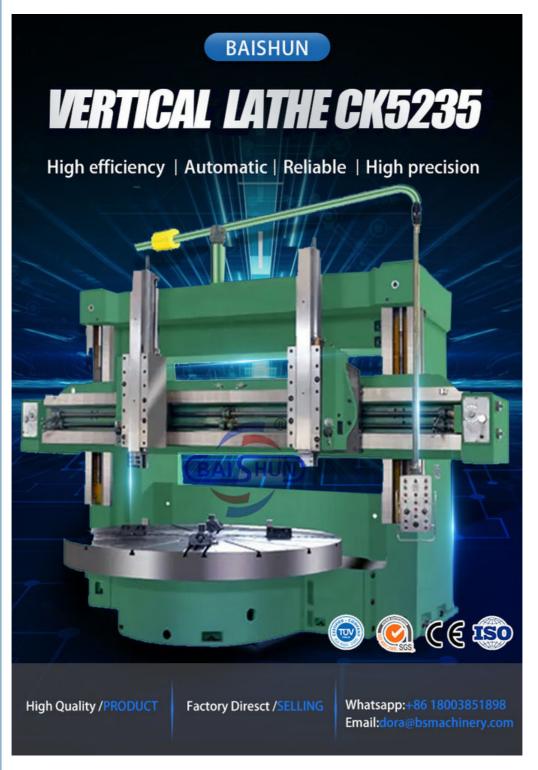


The double column vertical lathe is a cutting-edge piece of equipment that combines mechanical, electrical, and hydraulic components. It incorporates modern design principles and manufacturing techniques, leveraging CAD optimization and state-of-the-art components from both domestic and international sources. The machine boasts a robust structure, offering exceptional strength, high static and dynamic stiffness, precise machining capabilities, heavy load capacity, efficiency, durability, and reliable operation. All major technical specifications of the machine parts comply with national standards.

With our outstanding production equipment, strong technical capabilities, rigorous inspection methods, and effective management system, BAISHUN Machine has obtained the ISO9001:2008 Quality Management System Certification at the national level.

Machine parameter

Specifications U	Jnit (CK5225	CK5231	CK5240Q	CK5240
Max.turning diameter m	nm 2	2500	3150	4000	4000

Max. height of work piece	mm	1600/2000/2500	1600/2000/2500	1600/2000/2500	1600/2000/2500
Max. weight of work piece	Т	10/20	10/20	10/20	32
Worktable diameter	mm	2250	2830	2830/3150	3200/3600
Range of table speeds	r/min	2-63	2-63	2-63	2-63
Steps		16	16	16	16
Max torque of work table	KN.m	63	63	63	100
Rapid traverse of rail head	mm/min	4000	4000	4000	4000
Ram vertical travel of right railhead	Kn	35	35	35	40
Ram vertical travel of left railhead	kn	30	30	30	30
Range cutting force of right railhead	mm/min	1-50	1-50	1-50	1-50
Range cutting force of right railhead	mm/min	0.1-1000	0.1-1000	0.1-1000	0.1-1000
Travel of arm	mm	1000	1000	1000	1250
Section of arm	mm	255×200	255×200	255×200	240×240
Swivel of left and right railhead	0	±30°	±30°	±30°	±30°
Section of tool	mm	40×50	40×50	40×50	50×50
Power of main motor	Kw	55	55	55	75
Overall dimensions	cm	569×470×480/520	605×440×493/533	690×510×480/520	690×510×480/520

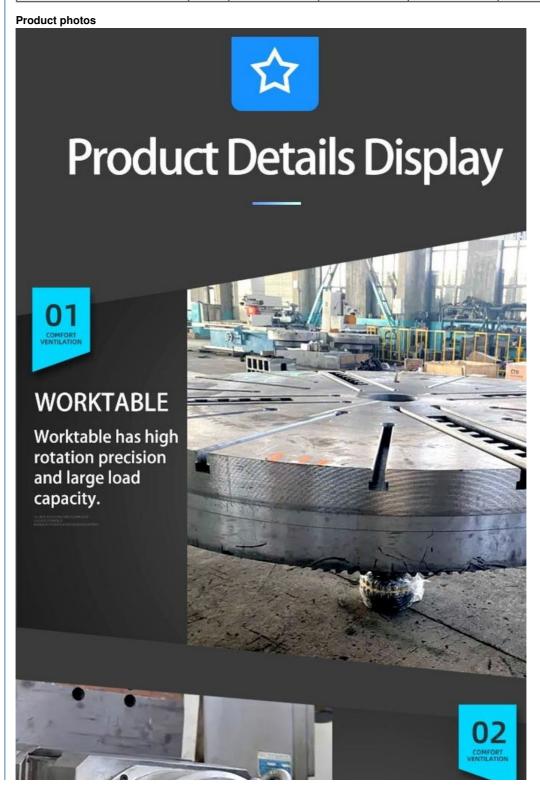







Henan Baishun Machinery Equipment Co., Ltd.







lathemach.com

No.65, Tianming Road, Jinshui District, Zhengzhou City, Henan Province, China