



Cnc Lathe Cutting Tools Fanuc Double Turret Vertical Lathe With High Efficiency

Our Product Introduction

for more products please visit us on lathemach.com

Basic Information

- Place of Origin: Henan, China
- Brand Name: BAISHUN MACHINERY
- Certification: CE ISO
- Model Number: CK5235
- Minimum Order Quantity: 1
- Price: \$76,000.00/sets 1-4 sets
- Packaging Details:
 1. Outside we will pack the product with plastic to prevent wet.
 2. Outside of the cnc vertical lathe machine will be packed by strong wooden pallet.
- Delivery Time: 45 Working days
- Supply Ability: 20 Set/Sets per Month



Product Specification

- Product Name: Cnc Lathe Cutting Tools Fanuc Double Turret Vertical Lathe With High Efficiency
- Max. Length Of Workpiece (mm): 3500
- Max. Spindle Speed (r.p.m): 90 R.p.m
- Machining Capacity: Medium Duty
- Spindle Bore(mm): 105
- Width Of Bed (mm): 250 Mm
- Spindle Motor Power(kW): 55
- No. Of Spindles: Twin
- Weight (KG): 55000
- Highlight: Vertical Lathe Cnc Lathe Cutting Tools, High Efficiency Cnc Lathe Cutting Tools




More Images



BAISHUN

VERTICAL LATHE CK5240

High efficiency | Automatic | Reliable | High precision

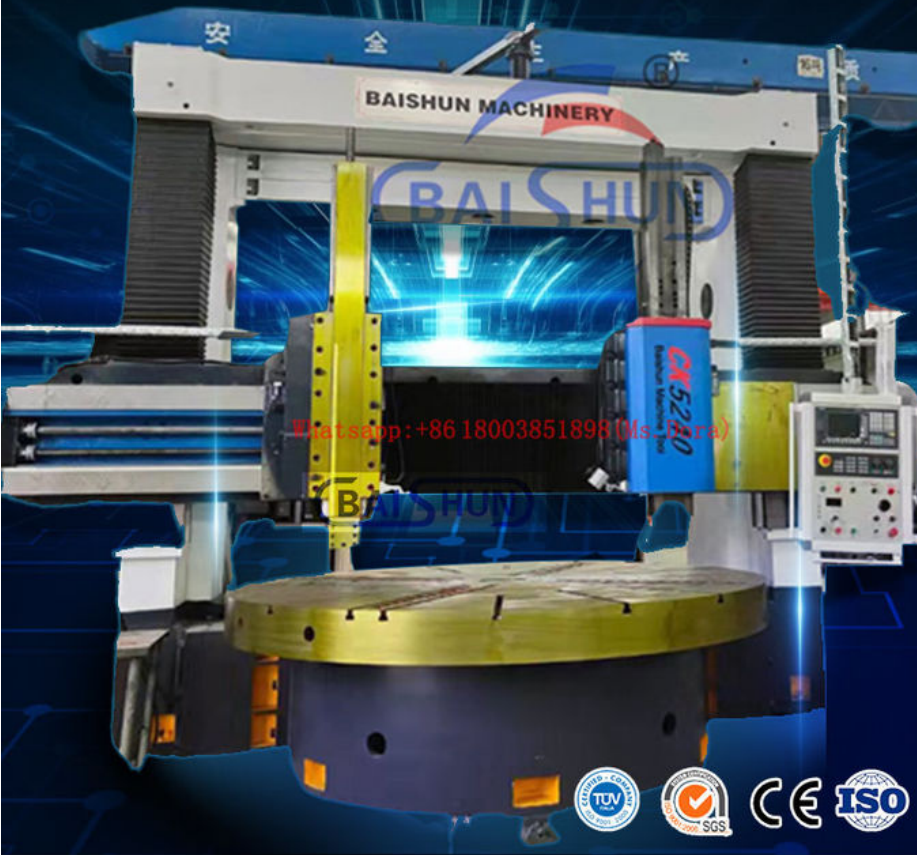

Whatsapp: +86 18003851898 (Ms. Dora)

TUV ISO CE SGS

High Quality /PRODUCT Factory Diresct /SELLING Whatsapp: +86 18003851898
Email: dora@bsmachinery.com

Cnc Lathe Cutting Tools Fanuc Double Turret Vertical Lathe With High Efficiency

This machine is suitable for high speed steel and alloy cutting tools, hardware for ferrous metal, nonferrous metal and some non-metallic parts inside and outside the cylinder, end, grooving of rough finish machining, etc.

The beam is placed in front of the column, so that the beam does vertical movement on the column. There is a lifting box on the upper part of the column, which is driven by the AC motor. Through the worm pair and the lead screw, the beam moves up and down along the column guide rail. All large parts are made of high strength, low stress cast iron HT250, after aging treatment, eliminate stress to ensure the accuracy of the machine tool.


The CNC vertical lathe is a top-performing machine with a wide range of capabilities and high productivity. Our company has developed a cutting-edge machine tool that seamlessly integrates animatronics and hydraulics, drawing inspiration from advanced design and manufacturing techniques, and incorporating our rich corporate culture. This allows us to deliver world-class products to both domestic and international customers.

Machine parameter

Specifications	Unit	CK5225	CK5231	CK5240Q	CK5240
Max.turning diameter	mm	2500	3150	4000	4000
Max. height of work piece	mm	1600/2000/2500	1600/2000/2500	1600/2000/2500	1600/2000/2500
Max. weight of work piece	T	10/20	10/20	10/20	32
Worktable diameter	mm	2250	2830	2830/3150	3200/3600
Range of table speeds	r/min	2-63	2-63	2-63	2-63
Steps		16	16	16	16

Max torque of work table	KN.m	63	63	63	100
Rapid traverse of rail head	mm/min	4000	4000	4000	4000
Ram vertical travel of right railhead	Kn	35	35	35	40
Ram vertical travel of left railhead	kn	30	30	30	30
Range cutting force of right railhead	mm/min	1-50	1-50	1-50	1-50
Range cutting force of right railhead	mm/min	0.1-1000	0.1-1000	0.1-1000	0.1-1000
Travel of arm	mm	1000	1000	1000	1250
Section of arm	mm	255×200	255×200	255×200	240×240
Swivel of left and right railhead	°	±30°	±30°	±30°	±30°
Section of tool	mm	40×50	40×50	40×50	50×50
Power of main motor	Kw	55	55	55	75
Overall dimensions	cm	569×470×480/520	605×440×493/533	690×510×480/520	690×510×480/520

Product photos




Product Details Display


01

COMFORT VENTILATION

WORKTABLE

Worktable has high rotation precision and large load capacity.





02

COMFORT VENTILATION

ELECTRIC TOOL POST



POST
Clients can choose
4,5,6 station
electric tool post.

03

COMFORT
VENTILATION

COLUMN/ CROSS BEAM

High frequency column
and beamguide,
hardness HRC-55
degree.




04

COMFORT
VENTILATION

CONTROL SYSTEM

Standard with
GSK980TDi control
Optional:Siemens,
Fanuc,Syntec ect.



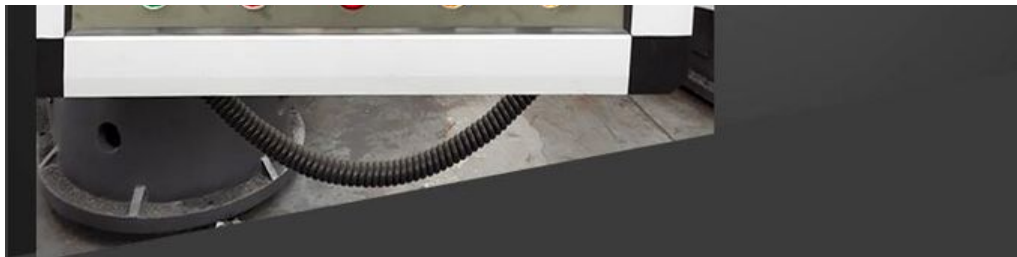

WORKBENCH STRUCTURE:

Table par is consisting of the workbench, table base, spindle components and transmission components. Workbench and workbench base respectively for the overall casting structure, the use of high strength and low stress cast iron, grade HT250 aging treatment has sufficient rigidity, strength and stability. Workbench bearings using high precision NN30 series double row short cylindrical roller bearings, by adjusting the radial clearance to ensure high precision rotary table, and a high working life. Workbench guide rail for constant current hydrostatic guide, to ensure long-term stable work bench.

Packaging & Shipping

Payment terms

We usually use T/T, L/C

T/T:T/T 30% in advance, the balance be paid after inspection before the delivery

Before delivery, we will send you the pictures of finished machines and welcome you to come to our factory for inspection

Way of packing

FCL&LCL export standard in 20/40feet container

FCL:Sea-worthy package,machine are fixed in container and the spare parts are packed in wooden boxes

Shipping

MSK/MSC/APL/EMC/PIL and so on

Warranty

12 months under normal use except for wearing parts

Contact

**We are a direct-sale lathe machine manufacturer, not a trading company,
which means we can offer you the best prices.**

**Welcome get in touch with us:)
Tel:+86 18003851898**



Henan Baishun Machinery Equipment Co., Ltd.



+8618939515188



sale@goodlathe.com



lathemach.com

No.65, Tianming Road, Jinshui District, Zhengzhou City, Henan Province, China