



Conventional Single Column Vertical Turret Lathe Hight Rigidity Liner

Our Product Introduction

for more products please visit us on lathemach.com

Basic Information

- Place of Origin: Henan, China
- Brand Name: BAISHUN MACHINERY
- Certification: CE/ISO9001
- Model Number: CK5126
- Minimum Order Quantity: 1 Set
- Price: Negotiable
- Packaging Details: Export standard wooden case package or Negotiation with customers
- Delivery Time: 45 work days
- Payment Terms: L/C, T/T, Western Union
- Supply Ability: 20 Set/Sets per Month



Product Specification

- Product Name: Conventional Single Column Vertical Turret Lathe Hight Rigidity Supplier Liner
- Machine Type: CK5126
- Max. Turning Diameter(mm): 2600
- Max. Height Of Workpiece(mm): 1200
- Worktable Size(mm): 2250
- Max.weight Of Workpiece: 8tons
- No. Of Spindles: Single
- Voltage: 380V
- Key Words: Vertical Turning Lathe
- Function: Metal Turning
- Highlight: Conventional Single Column Vertical Turret Lathe
, Liner Single Column Vertical Turret Lathe



More Images



Product Description

Conventional Single Column Vertical Turret Lathe Hight Rigidity Supplier Liner

The CNC single-column vertical lathe is versatile for machining ferrous metals, nonferrous metals, and some non-metallic materials. It can perform operations such as turning end faces, internal and external cylindrical surfaces, conical surfaces, and hole drilling, expanding, and reaming. The main transmission is driven by an AC servo motor on the spindle, with hydraulic gear changes and two-gear stepless speed regulation. The worktable features a manual 4-jaw single movement chuck.



Technical Introduction:

1. Vertical lathe is suitable for the industries of mechanical processing, can be used for inside and outside the cylinder, cone surface and face, cutting, cutting, etc. Of coarse and fine turning processing.


2. Workbench using hydrostatic guideway, main shaft adopt high precision NN30 type (D) double row cylindrical roller bearing, thus workbench large carrying capacity, high rotary precision. Machine tool electric using domestic brand-name products, high reliability.

3. Machine is made of high qualified epc process, high quality, the annealing aging treatment, appearance beautiful, durable, good agreeableness, convenient operation and maintenance.

Machine parameter

Model	CK518	CK5112Q	CK5112A	CK5116Q	CK5120A	CK5126A
Max. turning diameter of vertical tool rest (mm)	800	1200	1200	1600	2000	2600
Working table diameter (mm)	700	1000	1000	1400	1800	2200
Max. height of work-piece (mm)	800	1000	1000	1200	1250	1400
Max. weight of work-piece (kg)	1500	1500	3200	3200	8000	8000
Range of worktable rotation speed (rpm)	30-260	20-180	6.3-200	15-160	3.2-100	2.2-70
Feeding series	Stepless	Stepless	Stepless	Stepless	Stepless	Stepless
Range of tool rest feed (mm/min)	0.25-90	0.25-90	0.8-86	0.25-90	0.8-86	0.8-86
Cross beam travel (mm)	500	1000	650	1200	890	1090
Horizontal travel of tool rest (mm)	500	700	700	900	1115	1400
Vertical travel of tool rest (mm)	450	500	650	750	800	800
Size of section of cutter bar (mm)	30*40	30*40	30*40	30*40	30*40	30*40
Main motor power (kw)	11	15	22	15	30	30

Detail Machine Photo:

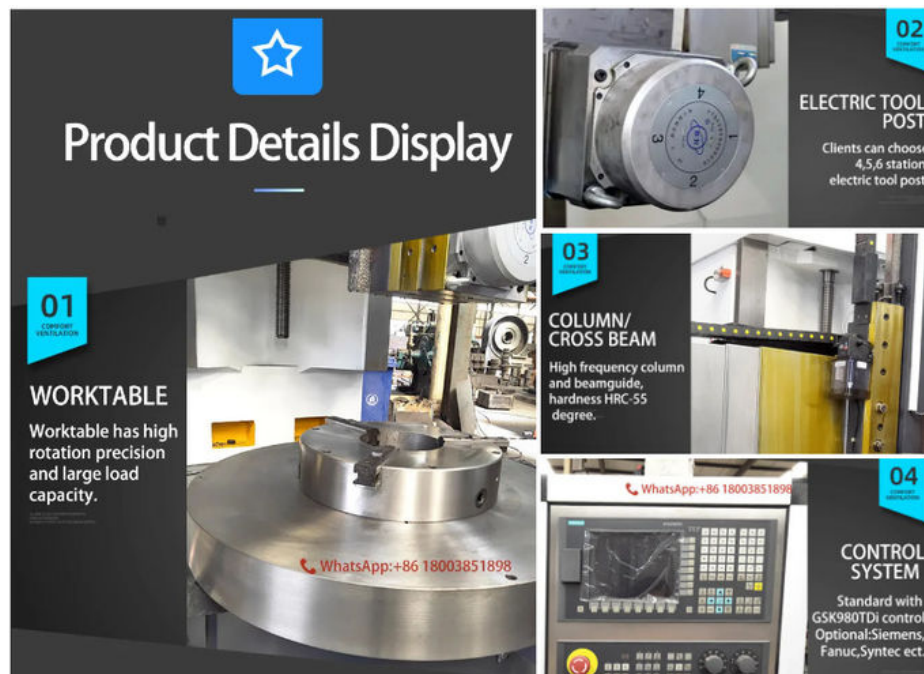

We are a direct-sale lathe machine manufacturer, not a trading company, which means we can offer you the best prices.

Welcome get in touch with us:)

Tel/Whatsapp:+86 18003851898 (Miss Dora)



Henan Baishun Machinery Equipment Co., Ltd.



+8618939515188



sale@goodlathe.com



lathemach.com

No.65, Tianming Road, Jinshui District, Zhengzhou City, Henan Province, China