

Cnc Mini Lathe Machine Single Column Vertical Lathe Price With Protection Cover

Basic Information

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity:
- Price:
- Packaging Details:
- Delivery Time:
- Payment Terms:
- Supply Ability:



Cnc Mini Lathe Machine Single Column Vertical Lathe Price With Protection Cover



Product Specification

- Product Name:
- Machine Type:
- Max. Turning Diameter(mm):
- Max. Height Of Workpiece(mm):
- Worktable Size(mm):
- Max.weight Of Workpiece: 3.2tons
- No. Of Spindles:
- Voltage:
- Key Words:
- Function: Metal Turning
 Highlight: Single Column

CK5116

1600

1200

1400

Single 380V

Single Column Vertical Lathe, Protection Cover Vertical Lathe, Cnc Mini Lathe Machine

Vertical Turning Center



More Images



Product Description

Cnc Mini Lathe Machine Single Column Vertical Lathe Price With Protection Cover

China Hot sale Multi-purpose CNC Vertical Turning Lathe is suitable to process ferrous metal, nonferrous metals and partial non-metallic material, and could achieve the processing of turning of the end face, inside and outside cylindrical surface, inside and outside circular conical surface and drilling, expanding, reaming of hole. Main transmission is driven by the spindle AC servo motor, hydraulic gear change and two gears step less speed regulation. Worktable is manual 4-jaw single movement chuck.



Tool Holder:

The default tool post is a four-position electric tool post, which is selected from YANTAI Universal Brand and belongs to the best tool post supplier in China. Depending on the size of the machine tool, we also provide 6-position and 8-position tool post.

Chip Conveyor:

If machine has full cover, the Chip Conveyor should be choose. It is suitable for steel industry scrap (material) fast delivery. With special structure can be better suitable for the delivery of chips under bad working conditions, such as steel pipe industry wire machine produced by the long strip of large roll chip.

Worktable:

The worktable is made of high-hardness materials. Under the condition of ensuring large bearing capacity, the guide surface of the workbench base has been scraped, which makes the machining accuracy higher, which has a significant advantage over the same industry.

Electrical control BOX

Electrical control elements are installed in the power distribution cabinet, and all operating elements are centrally installed in the hanging button station.


Machine parameter

Model	CK518	CK5112Q	CK5112A	CK5116Q	CK5120A	CK5126A
Max. turning diameter of vertical tool rest (mm)	800	1200	1200	1600	2000	2600
Working table diameter (mm)	700	1000	1000	1400	1800	2200
Max. height of work-piece (mm)	800	1000	1000	1200	1250	1400
Max. weight of work-piece (kg)	1500	1500	3200	3200	8000	8000
Range of worktable rotation speed (rpm)	30-260	20-180	6.3-200	15-160	3.2-100	2.2-70
Feeding series	Stepless	Stepless	Stepless	Stepless	Stepless	Stepless
Range of tool rest feed (mm/min)	0.25-90	0.25-90	0.8-86	0.25-90	0.8-86	0.8-86
Cross beam travel (mm)	500	1000	650	1200	890	1090
Horizontal travel of tool rest (mm)	500	700	700	900	1115	1400

Vertical travel of tool rest (mm)	450	500	650	750	800	800
Size of section of cutter bar (mm)	30*40	30*40	30*40	30*40	30*40	30*40
Main motor power (kw)	11	15	22	15	30	30

Detail Machine Photo:



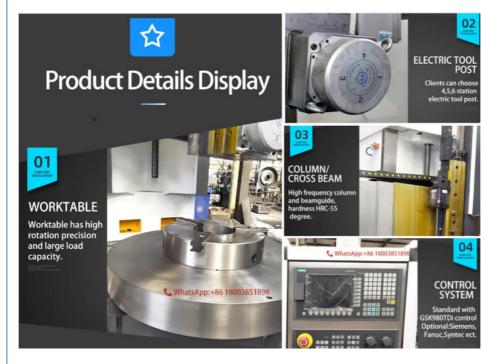

Shipping and Delivering:



Packing and transportation before export



We are a direct-sale lathe machine manufacturer, not a trading company, which means we can offer you the best prices.

Welcome get in touch with us:) Tel/Whatsapp:+86 18003851898 (Miss Dora)

