

China

ISO

1

BAISHUN

QK1327

within 45days

20/month

USD 27000-34000/Set

L/C, T/T, Western Union

Pallet and wooden case package

China Supply Cnc Oil Country Lathe QK1319 Automatic Metal Pipe Threading **Process Lathe Machine**

Basic Information

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity:
- Price:
- · Packaging Details:
- Delivery Time:
- Payment Terms:
- Supply Ability:



Product Specification

• Product Name:

Model:

Bed:

• Key Words:

• Function:

• Highlight:

• Power:

- Pipe Threading Process Lathe Machine QK1327X1500 Max. Swing Diameter Over 800mm • Max.threading Diameter: 275mm • Spindle Bore: 280mm • Max.length Of Workpiece: 1500mm Pipe Threading Lathe Screw Cutting 15 · Machine Weight: 8000kg
 - Metal Pipe Threading Lathe Machine, China Supply Pipe Threading Lathe, **Cnc Oil Country Lathe Machine**



More Images







China supplyu cnc oil country lathe QK1319 automatic metal pipe threading process lathe machine

Product Description:

CNC pipe threading machine is a high efficiency, high precision two coordinate continuous control CNC machine independently researched and developed according to the development needs of petroleum industry. The machine has high power, good rigidity, can cut straight, oblique, arc, male, inch thread, and has a variety of functions such as tip radius compensation. The machine features high rigidity and high power. It is a high precision and high efficiency pipe thread machining machine.

It can be used for rough machining and finishing machining of mechanical parts, especially suitable for petroleum, mining, machinery and other industries, for high-efficiency, high-volume and high-precision processing of rotary parts. And also can process steel, cast iron, non-ferrous metals and other materials. With mechanical and electrical integration design, advanced structure, reasonable layout, beautiful shape, the use of integral bed, good rigidity and stability; Machine automatic lubrication system.

Features:

- 1. Big spindle bore and double chuck to ensure process big diameter pipe.
- 2. One-piece bed adopts high strength casting iron to ensure rigidity and precision.
- 3. Ultrasonic frequency quenched guide-ways ensure good wear-resistance.
- 4. Surface of carriage and guide way with high accuracy.



| Model | | Unit | QK1325 | QK1327 | QK1332 | QK1335 | QK1353 | QK1363 | | |
|-----------------------------------|------------------------|--------|--|---------------------------|---------------------------|--------------------------|-------------------------|-------------------------|--|--|
| CNC System | | / | Standard configuration:GSK980TDi Optional: FANUC; SIMENS;KND;etc. | | | | | | | |
| Max dia.swing over bed | | mm | 800 | 800 | 800 | 1000 | 1250 | 1400 | | |
| Max dia.swing over cross slide | | mm | 480 | 480 | 480 | 610 | 860 | 950 | | |
| Maxlength of work- piece | | mm | 1500 | 1500 | 1500 | 1500 | 1500 | 1500 | | |
| Pipe threading range | | mm | 70-250 | 70-275 | 80-320 | 150-350 | 350-525 | 450-625 | | |
| Width of bed | | mm | 600/650 | 755 | 755 | 755 | 755 | 755 | | |
| Spindle bore | | mm | 255 | 280 | 325 | 360 | 540 | 640 | | |
| Spindle center height | | mm | 400 | 400 | 400 | 500 | 625 | 700 | | |
| Power of spindle motor | | mm | 11 | 15 | 15 | 22 | 30 | 30 | | |
| Mode of spindle speed | | / | Two gears , step less in gears | | | | | | | |
| Range of spindle speed | | r/min | (L):15-100 (H):100-350 | (L):20-100 (H):100-300 | (L):20-130 (H):100-300 | (L):30-130 (H):65-260 | (L):20-80 (H):55-220 | (L):15-65 (H):65-120 | | |
| Max.traverse of X/Z | | mm | X:420 Z:1250 | X:420 Z:1250 | X:420 Z:1250 | X:450 Z:1250 | X:650 Z:1250 | X:750 Z:1250 | | |
| X/Z rapid | traverse | mm/min | 4000/5000 | 4000/5000 | 4000/5000 | 4000/5000 | 4000/5000 | 4000/5000 | | |
| Tailstock quill | Diameter | mm | 100 | 100 | 100 | 160 | 160/260 | 160/260 | | |
| | Travel | mm | 250 | 250 | 250 | 300 | 300 | 300 | | |
| | Taper | | Morse NO.6 | Morse NO.6 | Morse NO.6 | Morse NO.6 | Morse NO.6 | Morse NO.6 | | |
| | Model | | HAK21240 | HAK21300 | SLD170A04N | SLD170A04N | SLD170A04N | SLD170A04N | | |
| | No.of tool stations | | Vertical four-station | | | | | | | |
| Turret | Dimension of tool | mm | 32x32 | 32x32 | 32x32 | 32x32 | 32x32 | 32x32 | | |

of tool


| | Turret indexing time | s | 2.6 | 2.6 | 5.6 | 5.6 | 5.6 | 5.6 |
|---------------------------|----------------------------|----|----------------------------|-------|--------------|--------------|--------------|---------------------------------------|
| Chuck | | | K11-500 three jaw chuck | | K/2-780 four | jaw electric | jaw electric | K66-780 four jaw electric chuck |
| Positioning accuracy mm | | mm | 0.020 | 0.020 | 0.020 | 0.020 | 0.040 | 0.040 |
| Repositioning accuracy | | mm | 0.01 | 0.01 | 0.01 | 0.01 | 0.02 | 0.02 |
| Machine weight T | | Т | 6.5/7.2 | 8 | 10 | 10 | 18 | 19 |

Machine Details:





Packing and delivery:

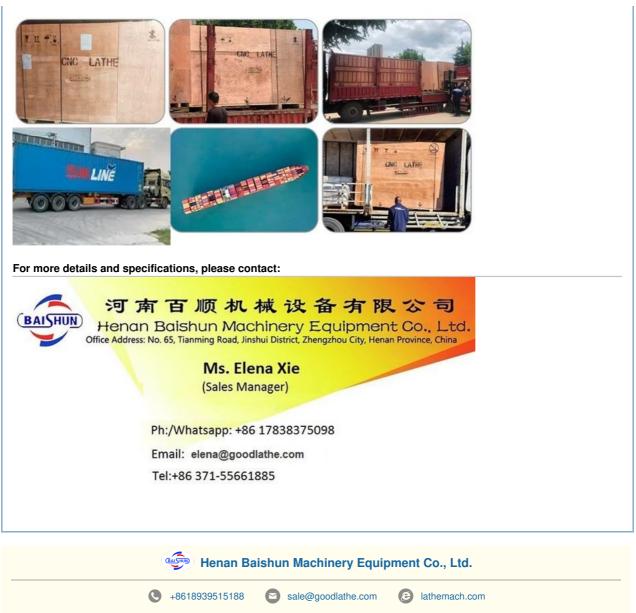

No.65, Tianming Road, Jinshui District, Zhengzhou City, Henan Province, China