



High Efficiency Thread And Screw Rolling Machine For Construction Bolts

Our Product Introduction

for more products please visit us on lathemach.com

Basic Information

- Place of Origin: China
- Brand Name: BAISHUN
- Certification: ISO CE
- Model Number: Z28-315
- Minimum Order Quantity: 1
- Price: USD8600-11000/SET
- Packaging Details: export standard wooden case
- Delivery Time: within 20 days
- Payment Terms: L/C, T/T, Western Union
- Supply Ability: 50SETS/Month






Product Specification

- Product Name: Thread And Screw Rolling Machine
- Type: Z28-315
- Roller Diameter: 8-110mm
- Thread Range: 0.5-8mm
- Inner Diameter Of Roller Wheel: 75mm
- Roller Die: Customized
- Power: 15kw
- Color: Blue And Gray
- Delivery: Fast Delivery
- Highlight: High Efficiency Thread Rolling Machine, Screw Rolling Machine For Construction Bolts, Construction Bolts Thread Rolling Machine



More Images



Product Description

High Efficiency Thread And Screw Rolling Machine For Construction Bolts

Description:

The thread rolling machine is a machine tool that forms threads on a workpiece through pressure. It mainly achieves thread, straight thread, oblique thread and other processing by rolling the workpiece in a cold state.

The thread rolling machine is a multifunctional cold extrusion forming machine tool. The thread rolling machine can perform thread, straight and diagonal rolling on the workpiece in the cold state within its rolling force range; straight tooth, helical tooth and helical spline gear Rolling; straightening, diameter reduction, roller burnishing and various forming rolling. The machine has a safe and reliable electro-hydraulic execution and control system, which allows each working cycle to be selected among three modes: manual, semi-automatic and automatic.


The thread rolling cold rolling process is an advanced non-cutting process that can effectively improve the intrinsic and surface quality of the workpiece. The radial compressive stress generated during processing can significantly improve the fatigue strength and torsional strength of the workpiece. An ideal process with high efficiency, energy saving and low consumption.




Technical Specification:

Model	Z28-315
Roller Diameter(mm)	8-110
Thread range(mm)	0.5-8
Inner dia.of roller wheel(mm)	75
Width of wheel(mm)	50-120
Dia.of roller wheel	170-220
Max.feeding force(kn)	300
Rotation speed of two main axis(r/m)	26;35;48;62
Hydraulic cease time regulation scope(s)	0.1-99.9
Main motor(kw)	15
Hydraulic motor(kw)	5.5
Machine size(mm)	2150x1800x1600
Machine weight(kg)	4500

More Details:

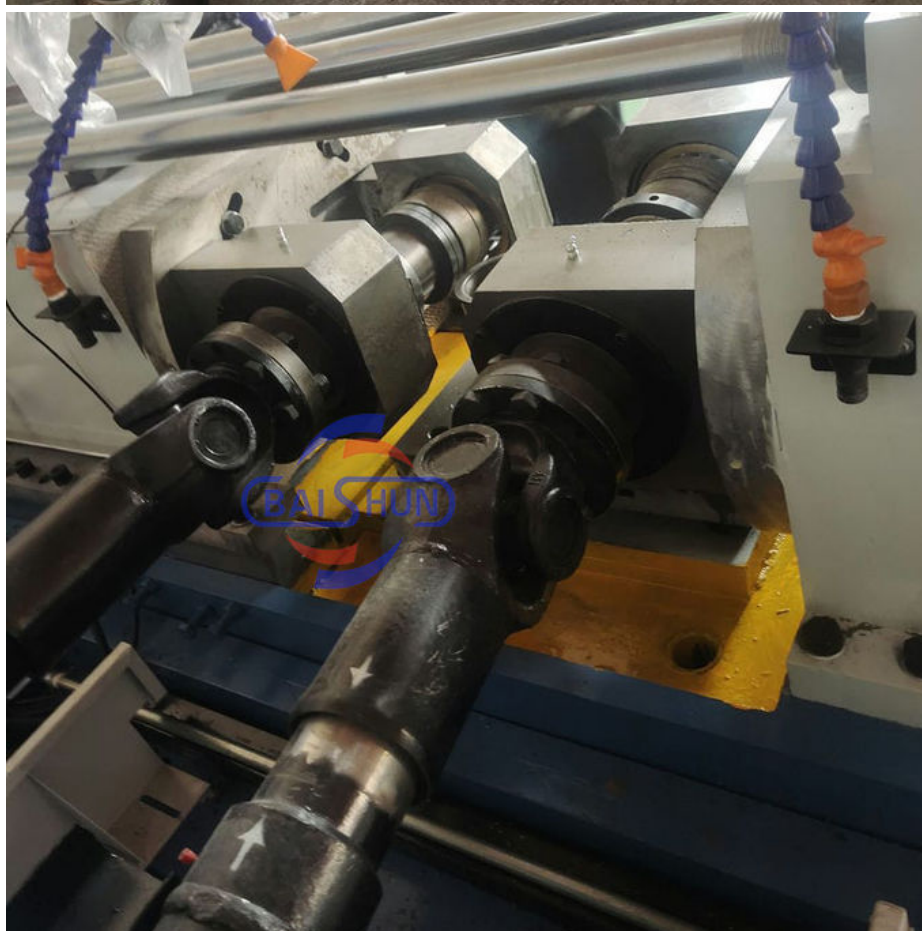

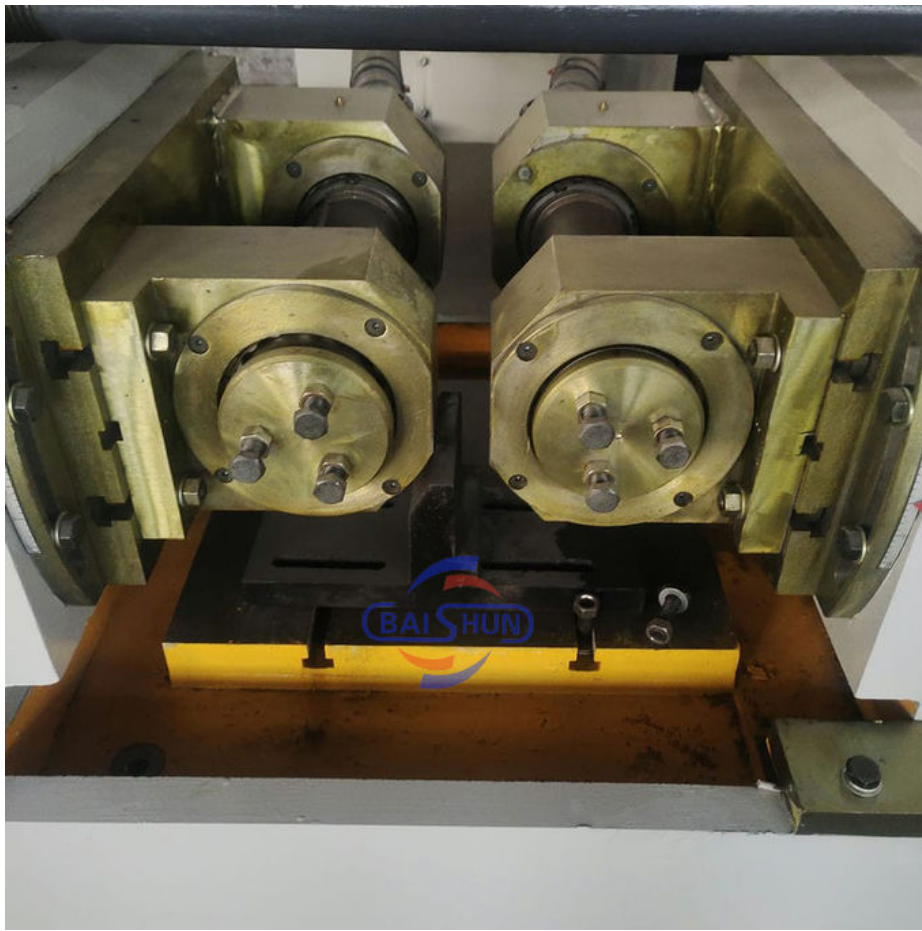



Contact:



河南百顺机械设备有限公司
Henan Baishun Machinery Equipment Co., Ltd.
Office Address: No. 65, Tianming Road, Jinshui District, Zhengzhou City, Henan Province, China

Ms. Elena Xie
(Sales Manager)

Ph:/Whatsapp: +86 17838375098

Email: elena@goodlathe.com

Tel:+86 371-55661885



Henan Baishun Machinery Equipment Co., Ltd.



+8618939515188



sale@goodlathe.com



lathemach.com

No.65, Tianming Road, Jinshui District, Zhengzhou City, Henan Province, China