



Double Column CNC Vertical Lathe Large Diameter Turning Machine Twin Spindle

Our Product Introduction

Basic Information

- Place of Origin: Henan, China
- Brand Name: BAISHUN MACHINERY
- Certification: CE/ISO9001
- Model Number: CK5235
- Minimum Order Quantity: 1 Set
- Price: Negotiable
- Packaging Details:
 1. Outside we will pack the product with plastic to prevent wet.
 2. Outside of the cnc vertical lathe machine will be packed by strong wooden pallet.
- Delivery Time: 30-35 work days
- Payment Terms: L/C,T/T,Western Union
- Supply Ability: 20 Set/Sets per Month




Product Specification

- Max. Length Of Workpiece (mm): 3500
- Max. Spindle Speed (r.p.m):50 R.p.m
- Machining Capacity: Medium Duty
- Spindle Bore(mm): 130
- Width Of Bed (mm): 250 Mm
- Spindle Motor Power(kW): 30
- No. Of Spindles: Twin
- Max. Turned Length (mm): 3500
- Number Of Axes: 2
- Travel (X Axis)(mm): 750 Mm
- Travel (Z Axis)(mm): 1800 Mm
- Positioning Accuracy (mm): ± 0.005
- Repeatability (X/Y/Z) (mm): ± 0.005
- Dimension(L*W*H): 3950*6300*4350mm



More Images



for more products please visit us on lathemach.com

Product Description

Double Column CNC Vertical Lathe Large Diameter Turning Machine Twin Spindle

Our CNC vertical lathe machine is specially designed for heavy duty metal turning and large diameter workpieces. It is widely used in machining flanges, bearing rings, valves, and other industrial components.

With a rigid double column structure and advanced CNC system, the machine ensures high precision, stability, and efficiency.

Double column vertical lathe is an advanced equipment with the integration of mechanical-electrical-hydraulic, which absorbing the new design philosophy and manufacturing technology. It adopts the CAD optimization design way, equips advanced functional components at home and abroad. In structure, it achieves strong strength, high dynamic and static stiffness, high precision, heavy loading, high efficiency, long service life, safe and reliable movement. Main technical specifications of each machine parts conform to the national related standards.

Machine has worktable base, worktable, main transmission box, gantry frame, beam, ram tool rest, feeding box, electrical system, operation station, hydraulic system, protection device and so on.

Worktable:

The worktable is composed of the worktable base, worktable, spindle components, and transmission device. It is made of cast iron, utilizing high-strength low-stress iron casting, which ensures sufficient rigidity, strength, and thermal stability. The worktable spindle bearing adopts high-precision double row short cylindrical roller bearings, guaranteeing precise rotation and long operational life.

Main transmission:

The machine employs a vertical shaft transmission system as its main drivetrain. It utilizes an AC servo motor to drive the spindle. The gearbox enables mechanical two-gear transformations by shifting the cylinder, allowing the worktable to achieve stepless speed regulation within the range of 0.63-63r/min.

Machine parameter


Specifications	Unit	CK5225	CK5231	CK5240Q	CK5240
Max.turning diameter	mm	2500	3150	4000	4000
Max. height of work piece	mm	1600/2000/2500	1600/2000/2500	1600/2000/2500	1600/2000/2500
Max. weight of work piece	T	10/20	10/20	10/20	32
Worktable diameter	mm	2250	2830	2830/3150	3200/3600
Range of table speeds	r/min	2-63	2-63	2-63	2-63
Steps		16	16	16	16
Max torque of work table	KN.m	63	63	63	100
Rapid traverse of rail head	mm/min	4000	4000	4000	4000
Ram vertical travel of right railhead	Kn	35	35	35	40
Ram vertical travel of left railhead	kn	30	30	30	30
Range cutting force of right railhead	mm/min	1-50	1-50	1-50	1-50
Range cutting force of right railhead	mm/min	0.1-1000	0.1-1000	0.1-1000	0.1-1000
Travel of arm	mm	1000	1000	1000	1250
Section of arm	mm	255×200	255×200	255×200	240×240
Swivel of left and right railhead	°	±30°	±30°	±30°	±30°
Section of tool	mm	40×50	40×50	40×50	50×50
Power of main motor	Kw	55	55	55	75
Overall dimensions	cm	569×470×480/520	605×440×493/533	690×510×480/520	690×510×480/520

Product photos

BAISHUN

VERTICAL LATHE CK5235

High efficiency | Automatic | Reliable | High precision

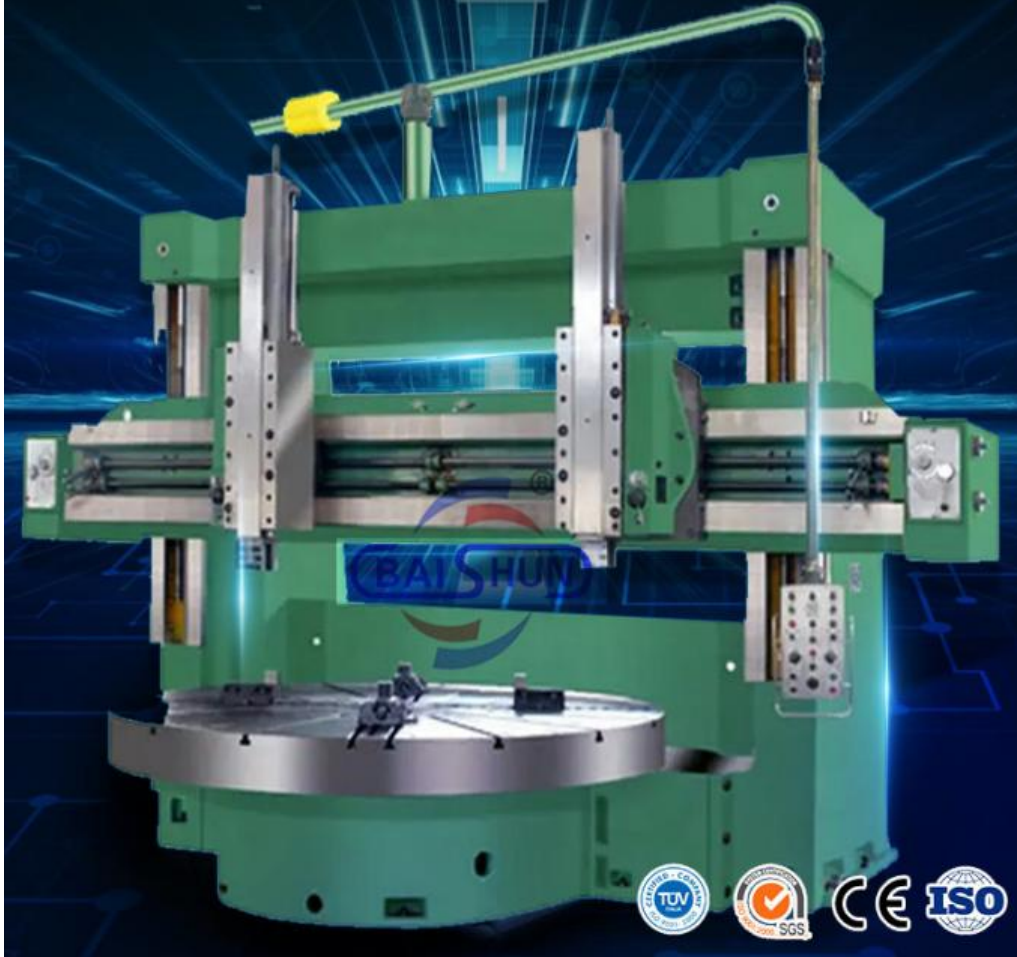

High Quality /PRODUCT

Factory Diresct /SELLING

Whatsapp:+86 18003851898

Email:dora@bsmachinery.com



Product Details Display

01



COMFORT
VENTILATION

WORKTABLE

Worktable has high rotation precision and large load capacity.

© 2014 Comfort Ventilation
www.comfortventilation.com



02

COMFORT
VENTILATION

ELECTRIC TOOL POST

Clients can choose 4,5,6 station electric tool post.

© 2014 Comfort Ventilation
www.comfortventilation.com



03

COMFORT
VENTILATION

COLUMN/ CROSS BEAM

High frequency column and beamguide, hardness HRC-55 degree.





04
COMFORT
VENTILATION

CONTROL SYSTEM

Standard with GSK980TDi control
Optional: Siemens, Fanuc, Syntec ect.



Ms.Dora

Contact us

Customer Service Manager
TEL: +86 18003851898
Mob: +86 18003851898 (Whatsapp/Wechat)
Email: dora@bsmachinery.com
Web: www.goodlathe.com



Henan Baishun Machinery Equipment Co., Ltd.

+8618939515188 sale@goodlathe.com lathemach.com

No.65, Tianming Road, Jinshui District, Zhengzhou City, Henan Province, China