

Henan Baishun Machinery Equipment Co., Ltd

# **Basic Information**

lathemach.com

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity:
- Price:
- · Packaging Details:
- Delivery Time:
- Payment Terms:
- Supply Ability:
- Henan, China **BAISHUN MACHINERY** CE/ISO9001 CK5126 1 Set Negotiable Export standard wooden case package or Negotiation with customers 45 work days L/C, T/T, Western Union

20 Set/Sets per Month



## **Product Specification**

- Product Name:
- Machine Type: • Max. Turning Diameter(mm):
- . Max. Height Of Workpiece(mm):
- Worktable Size(mm):
- Max.weight Of Workpiece: 8tons
- No. Of Spindles:
- Voltage:

• Function:

- . Key Words:
  - Metal Turning
- Highlight:
- Liner Vertical Lathe Machine Price CK5126 2600 1200 2250 Single 380V Vertical Turning Lathe

Low Cost Cnc Lathe Machine Single Column



# More Images





Vertical Cnc Lathe Machine, Single Column Cnc Lathe Machine, 380V Cnc Lathe Machine



### Product Description

#### Low Cost Cnc Lathe Machine Single Column Liner Vertical Lathe Machine Price

China Hot sale Multi-purpose CNC Vertical Turning Lathe is suitable to process ferrous metal, nonferrous metals and partial non-metallic material, and could achieve the processing of turning of the end face, inside and outside cylindrical surface, inside and outside circular conical surface and drilling, expanding, reaming of hole. Main transmission is driven by the spindle AC servo motor, hydraulic gear change and two gears step less speed regulation. Worktable is manual 4-jaw single movement chuck



The machine tool consists of a table, table base, column, beam, and vertical knife frame. The machine base is made of HT250 cast iron and undergoes a meticulous process of resin sand casting, followed by aging treatment (artificial aging and vibration aging). This ensures reliable casting quality without cracks, shrinkage, or white mouth tissue. The castings are treated to maintain a stable structure, ensuring the machine's stability during operation. Chemical composition analysis reports for the molten iron, as well as heat treatment reports and temperature-time curves, are provided as quality certifications.

#### **Technical Introduction:**

1.Vertical lathe is suitable for the industries of mechanical processing, can be used for inside and outside the cylinder, cone surface and face, cutting, cutting, etc. Of coarse and fine turning processing.

2.Workbench using hydrostatic guideway, main shaft adopt high precision NN30 type (D) double row cylindrical roller bearing, thus workbench large carrying capacity, high rotary precision. Machine tool electric using domestic brand-name products, high reliability.


3.Machine is made of high qualified epc process, high quality, the annealing aging treatment, appearance beautiful, durable, good agreeableness, convenient operation and maintenance.

Machine	parameter
---------	-----------

Model	CK518	CK5112Q	CK5112A	CK5116Q	CK5120A	CK5126A
Max. turning diameter of vertical tool rest (mm)	800	1200	1200	1600	2000	2600
Working table diameter (mm)	700	1000	1000	1400	1800	2200
Max. height of work-piece (mm)	800	1000	1000	1200	1250	1400
Max. weight of work-piece (kg)	1500	1500	3200	3200	8000	8000
Range of worktable rotation speed (rpm)	30-260	20-180	6.3-200	15-160	3.2-100	2.2-70
Feeding series	Stepless	Stepless	Stepless	Stepless	Stepless	Stepless
Range of tool rest feed (mm/min)	0.25-90	0.25-90	0.8-86	0.25-90	0.8-86	0.8-86
Cross beam travel (mm)	500	1000	650	1200	890	1090
Horizontal travel of tool rest (mm)	500	700	700	900	1115	1400

Vertical travel of tool rest (mm)	450	500	650	750	800	800
Size of section of cutter bar (mm)	30*40	30*40	30*40	30*40	30*40	30*40
Main motor power (kw)	11	15	22	15	30	30

**Detail Machine Photo:** 

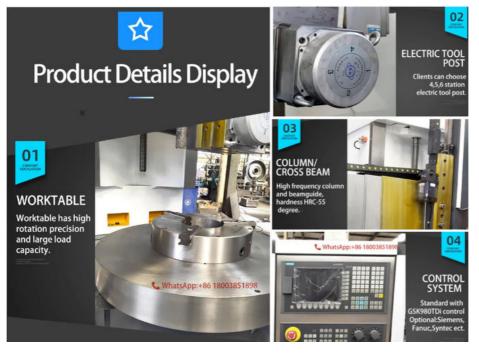

We are a direct-sale lathe machine manufacturer, not a trading company, which means we can offer you the best prices. Welcome get in touch with us:) Tel/Whatsapp:+86 18003851898 (Miss Dora)

+8618939515188

Henan Baishun Machinery Equipment Co., Ltd.

sale@goodlathe.com 📀 lathemach.com

No.65, Tianming Road, Jinshui District, Zhengzhou City, Henan Province, China