

# Cnc Single Column Vertical Turret Lathe Cheap Cnc Machine Lathe Gsk System

### **Basic Information**

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity:
- Price:
- Packaging Details:
- Delivery Time:
- Payment Terms:
- Supply Ability:
- Henan, China BAISHUN MACHINERY CE/ISO9001 CK5120 1 Set Negotiable Export standard wooden case package or Negotiation with customers 45 work days L/C, T/T, Western Union 20 Set/Sets per Month



### **Product Specification**

Product Name:	Used Cnc Single Column Vertical Turret Lathe Cheap Cnc Machine Lathe Gsk System
<ul> <li>Machine Type:</li> </ul>	CK5120
<ul> <li>Max. Turning Diameter(mm):</li> </ul>	2000
<ul> <li>Max. Height Of Workpiece(mm):</li> </ul>	1200
<ul> <li>Worktable Size(mm):</li> </ul>	1800
• Max.weight Of Workpiece:	5tons
<ul> <li>No. Of Spindles:</li> </ul>	Single
<ul> <li>Voltage:</li> </ul>	380V
<ul> <li>Key Words:</li> </ul>	Vertical Turning Lathe
• Function:	Metal Turning
<ul> <li>Highlight:</li> </ul>	Single Column Cnc Vertical Turret Lathe, Used Cnc Vertical Turret Lathe, Gsk System Cnc Vertical Turret Lathe



# More Images







### **Product Description**

Used Cnc Single Column Vertical Turret Lathe Cheap Cnc Machine Lathe Gsk System



#### Use range of CK5120

CNC single column vertical lathe is suitable to process ferrous metal, nonferrous metals and partial non-metallic material, and could achieve the processing of turning of the end face, inside and outside cylindrical surface, inside and outside circular conical surface and drilling, expanding, reaming of hole. Maintransmission is driven by the spindle AC servo motor, hydraulic gear change and two gears stepless speed regulation. Worktable is manual 4-jaw single movement chuck .

#### **Technical Introduction:**

1.Suitable for mechanical processing industries, this vertical lathe can handle both internal and external cylinders, cone surfaces, and face cutting, accommodating both coarse and fine turning processes.


2. The workbench utilizes a hydrostatic guideway, and the main shaft employs high-precision NN30 type (D) double row cylindrical roller bearings, ensuring high load capacity and rotational precision. The machine's electrical components are sourced from reputable domestic brands, guaranteeing high reliability.

3.Manufactured using advanced EPC processes and high-quality materials, the machine undergoes annealing and aging treatments. This results in an attractive appearance, durability, excellent user-friendliness, and convenient operation and maintenance.

#### Machine parameter

Model	CK518	CK5112Q	CK5112A	CK5116Q	CK5120A	CK5126A
Max. turning diameter of vertical tool rest (mm)	800	1200	1200	1600	2000	2600
Working table diameter (mm)	700	1000	1000	1400	1800	2200
Max. height of work-piece (mm)	800	1000	1000	1200	1250	1400
Max. weight of work-piece (kg)	1500	1500	3200	3200	8000	8000
Range of worktable rotation speed (rpm)	30-260	20-180	6.3-200	15-160	3.2-100	2.2-70
Feeding series	Stepless	Stepless	Stepless	Stepless	Stepless	Stepless
Range of tool rest feed (mm/min)	0.25-90	0.25-90	0.8-86	0.25-90	0.8-86	0.8-86
Cross beam travel (mm)	500	1000	650	1200	890	1090
Horizontal travel of tool rest (mm)	500	700	700	900	1115	1400
Vertical travel of tool rest (mm)	450	500	650	750	800	800
Size of section of cutter bar (mm)	30*40	30*40	30*40	30*40	30*40	30*40
Main motor power (kw)	11	15	22	15	30	30



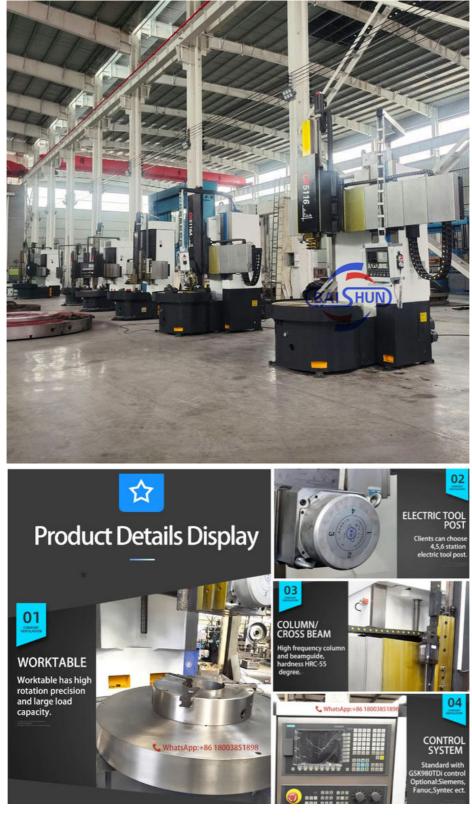

Shipping and Delivering:



Packing and transportation before export



We are a direct-sale lathe machine manufacturer, not a trading company, which means we can offer you the best prices.

## Welcome get in touch with us:) Tel/Whatsapp:+86 18003851898 (Miss Dora)

