

High Precision Hydraulic Frequency Control Screw Thread Rolling Machine

Basic Information

Place of Origin: China
Brand Name: BAISHUN
Certification: ISO CE
Model Number: Z28-215

Minimum Order Quantity:

• Price: USD8600-11000/SET

Packaging Details: export standard wooden case

Delivery Time: within 20 days

• Payment Terms: L/C, T/T, Western Union

• Supply Ability: 50SETS/Month



Product Specification

Product Name: Screw Thread Rolling Machine

Type: Z28-215
Roller Diameter: 8-100mm
Thread Range: 0.5-8mm
Inner Diameter Of Roller Wheel: 75mm

Roller Die: CustomizedPower: 11kw

Color: Blue And GrayDelivery: Fast Delivery

• Highlight: High Precision Screw Thread Rolling Machine,

Screw Thread Rolling Machine



More Images







Product Description


High Precision Hydraulic Frequency Control Screw Thread Rolling Machine

Description:

This machine ensures efficient and rapid thread rolling, meeting the demands of high-volume manufacturing environments. It is an ideal solution for high-quality thread rolling capabilities.

The thread rolling machine is a machine tool that forms threads on a workpiece through pressure. It mainly achieves thread, straight thread, oblique thread and other processing by rolling the workpiece in a cold state.

The thread rolling machine is a multifunctional cold extrusion forming machine tool. The thread rolling machine can perform thread, straight and diagonal rolling on the workpiece in the cold state within its rolling force range; straight tooth, helical tooth and helical spline gear Rolling; straightening, diameter reduction, roller burnishing and various forming rolling. The machine has a safe and reliable electro-hydraulic execution and control system, which allows each working cycle to be selected among three modes: manual, semi-automatic and automatic.

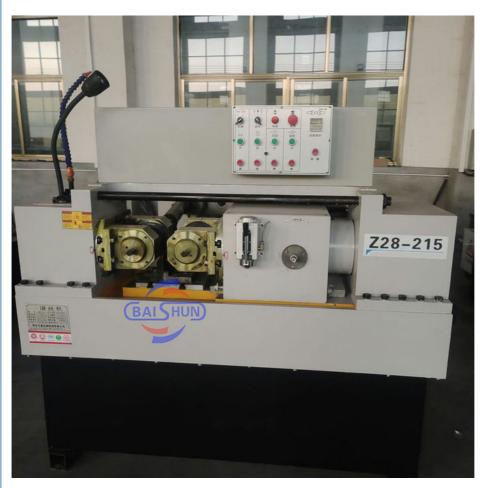


Technical Specification:

Model	Z28-215
Roller Diameter(mm)	8-100
Thread range(mm)	0.5-8
Inner dia.of roller wheel(mm)	75
Width of wheel(mm)	50-120
Dia.of roller wheel	170-220
Max.feeding force(kn)	300
Rotation speed of two main axis(r/m)	26;35;48;62
Hydraulic cease time regulation scope(s)	0.1-99.9
Main motor(kw)	11
Hydraulic motor(kw)	5.5
Machine size(mm)	2100x1850x1550
Machine weight(kg)	3800

More Details:



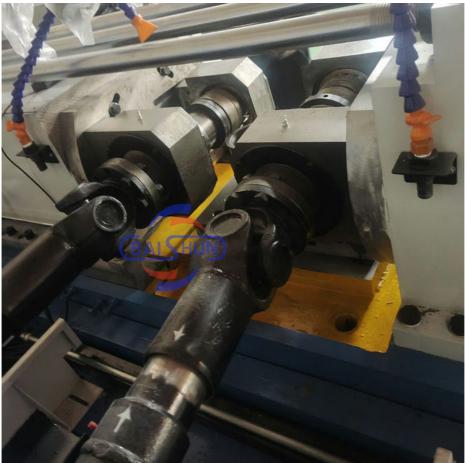







Contact:



河南百顺机械设备有限公司

Henan Baishun Machinery Equipment Co., Ltd. Office Address: No. 65, Tianming Road, Jinshui District, Zhengzhou City, Henan Province, China

Ms. Elena Xie

(Sales Manager)

Ph:/Whatsapp: +86 17838375098

Email: elena@goodlathe.com

Tel:+86 371-55661885



Henan Baishun Machinery Equipment Co., Ltd.



+8618939515188



sale@goodlathe.com



No.65, Tianming Road, Jinshui District, Zhengzhou City, Henan Province, China